

International Safety Technology Limited

PROTECTOWIRE
FireSystems

Features

- Line coverage...continuous sensitivity.
- Four temperature ratings.
- Withstands severe environmental conditions.
- Approved for hazardous locations.
- Easy to install, test, and splice.
- Compatible with other initiation devices on same circuit.
- Separate pre-alarm and alarm actuations (Type TRI).



Protectowire Linear Heat Detector

Description

Protectowire Linear Heat Detector is a proprietary cable that detects heat anywhere along its length. The sensor cable is comprised of two steel conductors individually insulated with a heat sensitive polymer. The insulated conductors are twisted together to impose a spring pressure between them, then wrapped with a protective tape and finished with an outer jacket suitable for the environment in which the Detector will be installed.

Protectowire is a fixed temperature digital sensor and is therefore capable of initiating an alarm once its rated activation temperature is reached. At the rated temperature, the heat sensitive polymer insulation yields to the pressure upon it, permitting the inner conductors to move into contact with each other thereby initiating an alarm signal. This action takes place at the first heated point anywhere along the Detector's length. It does not require that a specific length be heated in order to initiate an alarm nor is system calibration necessary to compensate for changes in the installed ambient temperature. Protectowire Linear Heat Detector provides the advantages of line coverage with point sensitivity.


International Safety Technology Limited
692775
11, Moor Road, Broadstone,
Dorset, BH18 8AZ
United Kingdom

Tel: +44 1202

Fax: +44 1202 605588
email sales@ist-limited.com
web www.ist-limited.com

Protectowire...

the first line of fire defense.

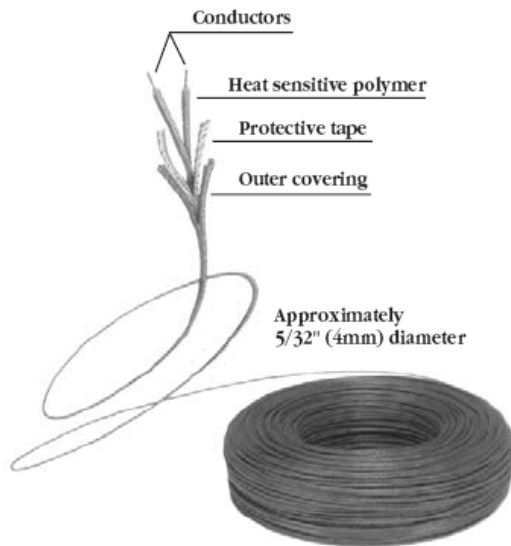

Applications

- Cable trays
- Conveyors
- Power distribution apparatus: switchgear, transformers, motor control centers
- Dust collectors/baghouses
- Cooling towers
- Warehouses/rack storage
- Mines
- Pipelines
- Bridges, piers, marine vessels
- Refrigerated storage
- Tank farms
- Aircraft hangars
- Computer rooms

Ideally suited to industrial high risk hazards as well as many types of commercial applications, Protectowire Linear Heat Detector has unique advantages over other types of detectors, especially when difficult installation factors or severe environmental conditions are present.

When used with a Protectowire FireSystem Control Panel, the Detector will activate a display, showing the location of an overheat or fire condition anywhere along its length. The Detector also meets intrinsically safe standards and is FM Approved for Class I, II, or III, Div. 1, Applicable Groups A, B, C, D, E, F & G hazardous areas, when the appropriate control panel option is ordered.

Protectowire Features & Benefits

- Identifies and displays, at the control panel, the alarm location anywhere along its length when used with the exclusive Protectowire Alarm Point Location Meter.
- Sensitivity not effected by changes in ambient temperature or length of cable used on the detection circuit. Compensating adjustments are not required.
- Steel inner conductors and select outer jackets, provide resistance to mechanical damage.
- Simple to install and splice with common tools. Junctions can be made without effecting the integrity of the system.
- Compatible with other types of alarm initiating devices on the same circuit such as manual pull stations, thermal heat detectors and smoke detectors.
- Can be installed in hazardous areas when used with suitably approved Protectowire Control Panels.
- Full range of temperatures and models available to accommodate the most demanding applications.
- Different temperature detectors may be utilized in the same initiating circuit.
- Available on stainless steel messenger wire for installations where mounting is difficult such as large open areas.
- Portable test equipment available for easy field service.
- Ideally suited for activation of extinguishment equipment, such as deluge or pre-action sprinkler systems.

Specifications

The Detector is made in multiple temperature ratings to allow for differences in normal or ambient temperature. Guidelines for selecting the proper detector temperature rating are the same as for automatic sprinklers and other heat actuated devices. Refer to the Temperature Rating Chart for proper model selection based upon installation temperature limits.

The Detector's product range consists of four distinct types of cable. Each designation identifies a specific outer jacket material which has unique characteristics that have been selected to accommodate the widest range of installation environments. All specifications are subject to change without notice.

EPC - Type EPC Protectowire consists of a durable flame retardant vinyl outer jacket. This series is best described as multi-purpose and is well suited to a wide range of both commercial and industrial applications. The outer jacket provides good all-around performance for most installations. It features low moisture absorption, resistance to many common chemicals, and excellent flexibility at low temperatures.

EPN - Type EPN utilizes a dual jacket consisting of an inner layer of vinyl with an outer film of black weather resistant 612 nylon. This cable is specifically designed for industrial applications such as conveyors, where abrasion resistance is of major importance. In general, the outer nylon sheath substantially improves the cable's resistance to abrasion, some acids, aggressive salts, oils and petroleum products while maintaining good electrical and mechanical properties.

EPR - The EPR series contains an extruded flame retardant jacket of polypropylene elastomer with a special UV stabilizer added to enhance weathering performance. It is intended for a wide range of industrial applications and is characterized by high resiliency, good abrasion resistance, excellent weathering properties and

International Safety Technology Limited
692775
11, Moor Road, Broadstone,
Dorset, BH18 8AZ

Tel: +44 1202

Fax: +44 1202 605588
email sales@ist-limited.com

exceptional high temperature performance. EPR provides better overall performance at higher ambient temperatures than either EPC or EPN.

TRI - Type TRI Protectowire is a unique dual temperature detector which is capable of initiating separate pre-alarm and alarm signals once each of its rated activation temperatures is reached. The Detector consists of a durable vinyl outer jacket which features low moisture absorption, resistance to many common chemicals, excellent flexibility and flame retardant. For complete information on this product, please refer to Data Sheet 9114.

Electrical

All cables are rated for 30 VAC, 42 VDC. Resistance is approximately one ohm per five feet (1.5m) of twisted pair (two conductors). Type TRI is .3 ohms per foot (.3m) of twisted cable (3 conductors).


Installation

Protectowire Linear Heat Detector is approved as a heat actuated automatic fire detector and is intended to be used on a supervised initiating circuit of an approved fire protective signaling control unit. The Detector must be installed in continuous runs without taps or branches in accordance with applicable sections of NFPA 70 National Electrical Code, NFPA 72 National Fire Alarm Code, or as determined by the local authority having jurisdiction.

Protectowire may be installed at the ceiling level or on the side walls within 20 inches of the ceiling, to protect areas within buildings (area protection). The Detector has the additional benefit of being suitable for installation close to the hazard in order to provide a rapid response (proximity or special application protection).

On smooth ceilings, the distance between detector runs shall not exceed the listed spacing. There shall be a detector run within a distance of one-half the listed spacing, measured at a right angle, from all walls, or partitions extending to within 18 inches (460 mm) of the ceiling as shown in the illustration.

The listed spacing shall be used as a guide or starting point in detector installation layout. Reduced spacing is required based upon factors such as ceiling height and construction, physical obstructions, air movement, or the authority having jurisdiction. When Protectowire is used to activate sprinkler systems, special Factory Mutual (FM) spacing guidelines may also be applicable to the specific hazard protected. It is mandatory that engineering judgment be applied in determining final detector location and spacing.

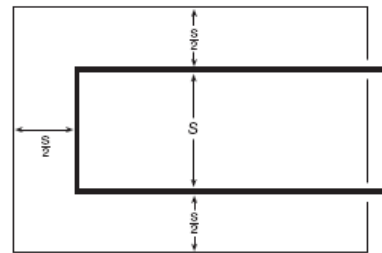

Ceiling of protected area
S=Listed spacing. See chart below.

In general, the use of Protectowire in any initiating device circuit, is limited to coverage of a specific hazard or area. Copper wire, of an approved type, with a minimum conductor size of 18 AWG, shall be installed from the control panel out to the hazard area where it is then connected to the beginning of the Protectowire portion of the circuit. The Protectowire portion of each initiating circuit shall begin and terminate at each end in an approved zone box or end-of-line zone box. Strain relief connectors, Model SR-502, shall be installed in all zone boxes where Protectowire enters or exits the enclosure, in order to hold the cable securely.

Temperature Ratings and Model Numbers (Use Linear Detector of Proper Temperature Rating)

	Regular 155°F (68.3°C)	Intermediate 190°F (87.8°C)	High 280°F (137.8°C)	Extra High 356°F (180°C)
Alarm Temperature	155°F (68.3°C)	190°F (87.8°C)	280°F (137.8°C)	356°F (180°C)
Max. Installed Ambient Temp.	Up to 100°F (37.8°C)	Up to 150°F (65.6°C)	Up to 200°F (93.3°C)	Up to 221°F (105.0°C) EPR Up to 250°F (121.1°C)
Multi-purpose/ Industrial	PHSC-155-EPC	PHSC-190-EPC	PHSC-280-EPC	*PHSC-356-EPC
Abrasion/Limited Chemical Resistance	PHSC-155-EPR	PHSC-190-EPR PHSC-190-EPN	PHSC-280-EPR	*PHSC-356-EPR

MODEL NO. PHSC-6893-TRI Dual Temperature Detector (TRI-Wire™)
Max. Installed Ambient Temp. = 100°F (37.8°C); Low Temp. Pre-alarm = 155°F (68.3°C); High Temp. Alarm = 200°F (93.3°C)

All Protectowire models can be supplied on Messenger Wire. Add suffix *-M* to above model numbers. *FM Approved for special application use only.

Approvals/Maximum Listed Spacing

Type EPC	Type EPN	Type EPR	Type TRI
UL (25 ft./7.6m)	UL (25 ft./7.6m)	UL (25 ft./7.6m)	—
FM (25 ft./7.6m)	FM (25 ft./7.6m)	FM (25 ft./7.6m)	FM (15 ft./4.6m)

International Safety Technology Limited
692775
11, Moor Road, Broadstone,
Dorset, BH18 8AZ
United Kingdom

Tel: +44 1202
Fax: +44 1202 605588
email sales@ist-limited.com
web www.ist-limited.com

Installation Accessories

A comprehensive range of mounting and installation accessories are available for the installation of Protectowire Linear Heat Detector. These include several types of clips, straps, drive rings, beam clamps, cable standoffs, connectors and zone boxes. Their proper use assures a neat and reliable installation. Only installation hardware supplied or approved by The Protectowire Company should be used.

Messenger wire (a Protectowire exclusive), is also available for any model Detector on special order. It consists of high tensile strength stainless steel wire, which is wound around the Detector at the rate of approximately one turn per foot. It is a carrier or support wire which is designed to simplify the installation of the Detector in areas where mounting is difficult due to the lack of appropriate support structures or mounting surfaces. When using messenger wire to support the Detector, turnbuckles and eyebolts must be employed at each end of a run to place tension on the support wire. The maximum Detector run length between turnbuckles should not exceed 250 feet (76m) and the wire must also

be supported with approved intermediate fasteners at intervals ranging from 15 feet (4.5m) to 50 feet (15m) depending upon the application. When ordering, add suffix "-M" to the Protectowire model number.

All models of Protectowire Linear Heat Detector have the same size conductors and are readily spliced together with common tools, by means of PWS Splicing Sleeves or PWSC Splicing Connectors. These devices are designed for this specific purpose and are the only approved methods of splicing the Detector.


System Capabilities

Protectowire Linear Heat Detector is a component of a complete family of systems manufactured by The Protectowire Company — a leader in fire detection for over sixty years.

Capabilities include meeting any fire defense need from hazardous area detection to auxiliary equipment shutdown and automatic extinguishing. Modular in design, Protectowire detection systems are designed to meet individual customer requirements and allow for system expansion at any time, providing long range economy.

Accessories

The Protectowire Company offers an assortment of fasteners and splicing devices to facilitate installation for both standard and special applications. Full details are available upon request.

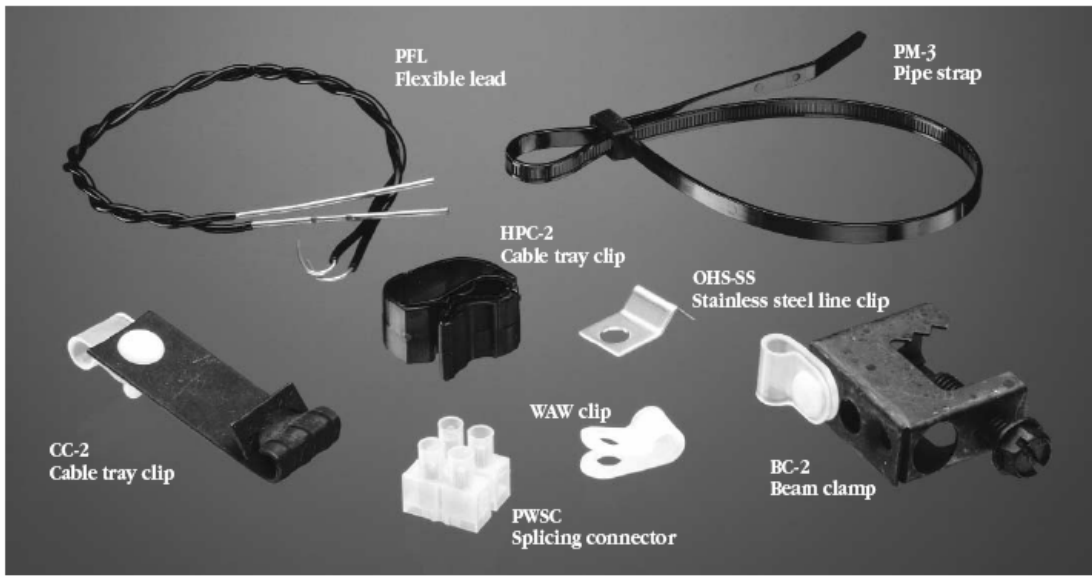

International Safety Technology Limited
692775
11, Moor Road, Broadstone,
Dorset, BH18 8AZ
United Kingdom

Tel: +44 1202

Fax: +44 1202 605588
email sales@ist-limited.com
web www.ist-limited.com